

PRODUCT INFORMATION SHEET



13325 Darice Parkway • Strongsville, OH 44149
216-252-7800 • 800-321-1130



DESCRIPTION

This product is a transparent, high pressure lubricant with high adhesive strength. A unique combination of natural and synthetic lubrication agents coupled with a high molecular weight polymer (PTFE) makes this product one of the best available.

FEATURES AND BENEFITS

Lasts longer than conventional lubricants. Withstands severe temperatures. Prevents sticking and freezing of rubber and metal. Works from -30°F to +600°F. Protects chains, cables and gears. Resists water washout. Applies as a thin penetrant and quickly sets to a clear tacky gel.

APPLICATIONS AND USES

Use on open gears, wire ropes and cables, chains and sprockets, and conveyors.

DIRECTIONS FOR USE

Shake well before using. Saturate area to be lubricated.
If necessary, repeat application.

SIZE / AVAILABILITY


20 oz. Aerosol
Net Weight 13 oz.
12 per case

STATE RESTRICTION

None.

PHYSICAL AND CHEMICAL PROPERTIES

Density	6.59 lb/gal
Density VOC	1.64 lb/gal
% VOC	24.9%
Appearance	Opaque
Odor Description	Pungent

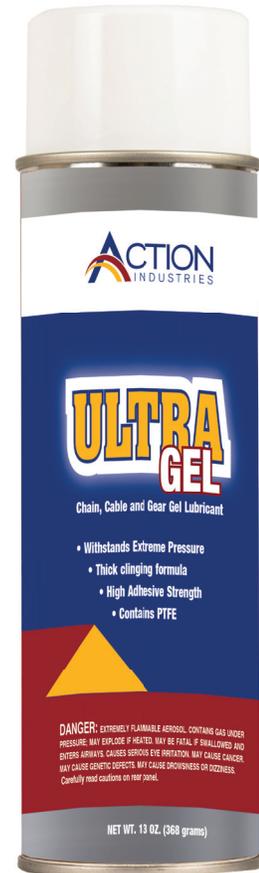

**Emergency
Phone Number
(800) 535-5053**

HMIS	
HEALTH	2
FLAMMABILITY	3
PHYSICAL HAZARD	0
PERSONAL PROTECTION	B

